

EXHIBIT SYSTEMS

www.panelplus.co

EXHIBIT SYSTEMS



ALUMINUM FRAMING SYSTEMS	FOGA
1" Square Aluminum Tubing204	Glazin
1" Tubing Connectors & Acc205-206, 209	Hinge
1-1/2" H.D. Aluminum Tubing207	Locks
1-1/2" Tubing Connectors & Accessories	Miscel
3/4" Square Aluminum Tubing	Produ
3/4" Tubing Connectors & Accessories	
Finger Pulls (Plastic)	Shelf I
Frame Door (Aluminum)	Shippi
Product Overview	Sliding
Sliding Door Tracks	Trim L
FOGA® EXHIBIT SYSTEMS	KLEM
Corner Couplings198	Klem®
Couplings	Mini K
Curved Profiles	
Display Fittings	Super
End Caps	STAN
Feet	Classi
Foga® Mini	
Gear-Edged Profiles	Lighte
	SEE

FOGA® EXHIBIT SYSTEMS	
Glazing Gaskets	198
Hinges	197
Locks	197
Miscellaneous Accessories	200
Product Overview	189-192, 201
Profiles	193-195
Shelf Holders	
Shipping Cases	201
Sliding Door Fittings	196, 199
Trim Locking Nuts	
KLEM [®] CONNECTING SYSTEMS	
Klem® Connectors Accessories	
Mini Klem [®] Connectors	
Product Overview	210
Super Klem [®] Connectors	
STANCHIONS (Crowd Control Products))
Classic Urn (Metal)	212
Heavy Duty Plastic	
Lighted LED Plastic	
SEE PAGES 1007-1023 FOR A	- Z INDEX

STANCHIONS (Crowd	Control	Products)
-------------------	---------	-----------

98	Plastic Kit (Value 4 Pack)	217
97	Plastic Landscape w/Stake	217
97	Plastic w/Base	217
00	Retract-It II (Metal w/Retractable Belt)	213
)1	Wood	214-215
95	STANCHIONS ACCESSORIES	
97	2 Sided Sign Holder (For Retract-It II)	213
)1	Plastic Chains	216
99	Plastic Clothes Pin	216
98	Plastic Connecting Links	216
	Plastic S-Hooks	216
11	POP Bowl (For Retract-It II)	213
11	Ropes for Stanchions	
10	Signage Adapters	216
11	Spring Loaded Connecting Link	216
	Wall Mount Belt (For Retract-It II)	213
12	Wall Mount Plate (For Retract-It II)	
8	Wall Plates (For Stanchion Ropes)	212
8	· · · · · ·	



The System with profile

A quality range of highly versatile modular exhibition display system.

The FOGA® Fastening System offers every conceivable Aluminum Profile, Connector, Hinge and Accessory Component needed to build Exhibits, Displays and Store Fixtures. All components are compatible with one another and are designed for use with industry standard hardware and accessories.

Design Team

A drawing or simple sketch are all we need to take the first step in bringing your project to life. Design assistance and quotations are provided at no charge. We can custom bend profiles to your exact specifications.

Let us help you get started on your next project.



So Simple To Build



From Which To Choose





Lock chamels together



Tighten connections with a hex key

Display Cases

Low Labor, Quick Setup, No Maintenance Patented 360° Hinge Inables you to create many configurations that readily fold in minutes for storage & shipping Image: Image:

Museums



For Design Assistance & Technical Information, please call.

Over 100 Profiles





50



92 see page 193

... THE POSSIBILITIES ARE ENDLESS!


Signs












...THE POSSIBILITIES ARE ENDLESS!

Display Cases





Show Booth



Store Displays

Museums








CHANNEL SPECS: Channel Widths: 9mm (11/32") Channel Depths: 10mm (3/8") **CONVERSIONS:** MM to IN: (MM ÷ 25.4) IN to MM: (IN x 25.4) MTR to FT: (MTR x 3.281) FT to MTR: (FT ÷ 3.281)



PROFILES

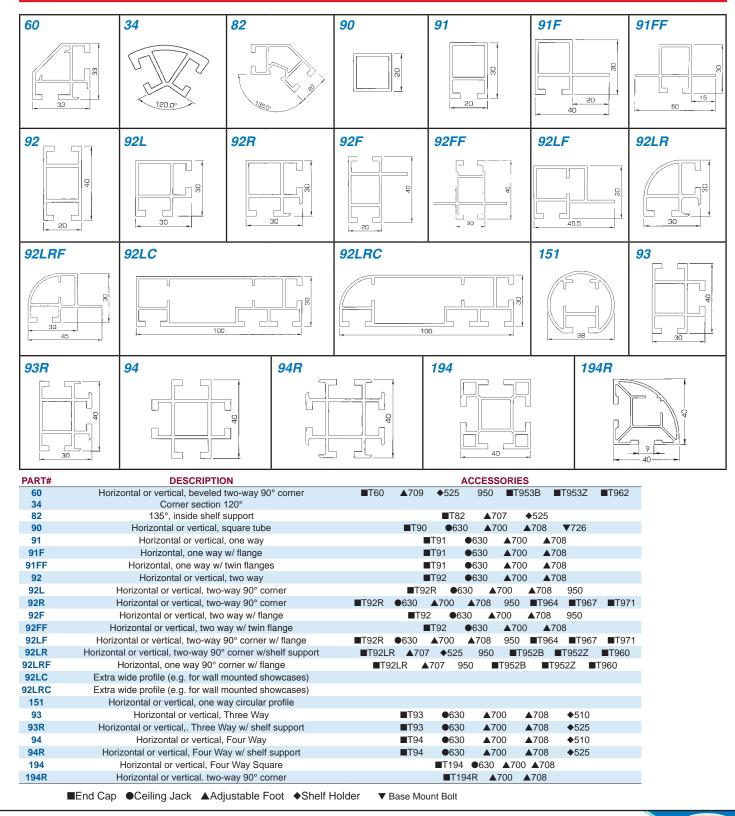


CHANNEL SPECS: Channel Widths: 9mm (11/32") Channel Depths: 10mm (3/8") CONVERSIONS: MM to IN: (MM ÷ 25.4) IN to MM: (IN x 25.4) MTR to FT: (MTR x 3.281) FT to MTR: (FT ÷ 3.281)



PROFILES

MOST ALUMINUM LENGTHS ARE STOCKED IN (5-MTR OR 16.4') LENGTHS

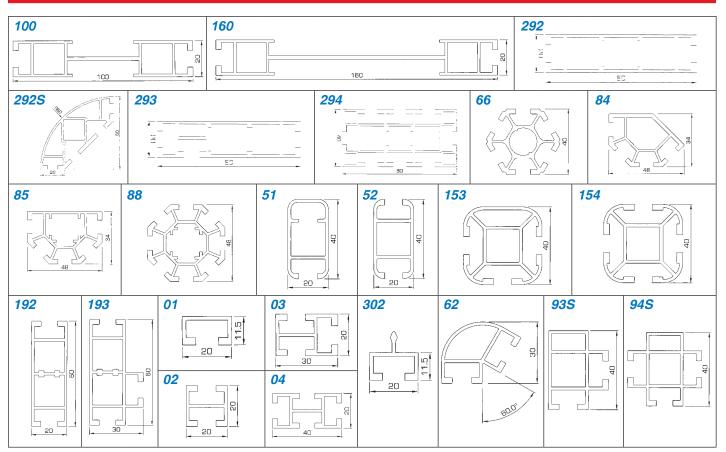


1.02	PART#	DESCRIPTION		ACC	ESSOR	RIES	
	100	Horizontal or vertical, two way 100mm deep fascia					
	160	Horizontal or vertical, two way 160mm deep fascia					
125	292	Horizontal or vertical, two way			■T92		
	292S	Horizontal or vertical, 4 Way Quadrant, large 90° corner					
<i>c</i>	293	Horizontal or vertical, 3 Way Side Channel					
	294	Horizontal or vertical, Eight Way for larger structural designs		194 🜒	630 🔺	700 🔺 7	708
	66	Six Way Pole		■T66	● 631	▲705	
	84	135°, Four Way Pole (section of 88)					
TK	85	180°, Five Way Pole (section of 88)		■T85	● 630	▲703	
	88	Eight Way Pole		■ T88	•630	▲703	
	51	Horizontal or vertical, one way rounded corners	∎T:	51 ●6	30 🔺 7	700 🔺	708
-	52	Horizontal or vertical, two way rounded corners	∎T{	51 🛛 🖲 6	530 🔺	700 🔺	708
	153	Horizontal or vertical, three way rounded corners	■T1	53 🔮	630 🔺	700 🔺	708
	154	Horizontal or vertical, four way rounded corners	■T1	54 🛛 🕯	630 🔺	700 🔺	708
1	192	Horizontal or vertical, Two Way					
	193	Horizontal or vertical, Three Way					
	01	Horizontal or vertical, single channel		•6	10 ●6	513	
	02	Horizontal or vertical, twin channel		•6	10 🛛 🖲	513	
	03	Horizontal or vertical, three way channel					
	04	Horizontal or vertical, four way channel					
	302	Snap fit panel profile 01 (use w/ 313 in-channel clips)					
	62	60° corner profile					
	93S	Profile 93 One Side Closed	■T93	●630	▲700	▲708	♦510
	94S	Profile 94 One Side Closed	T 94	● 630	▲700	▲708	♦510

■End Cap ●Ceiling Jack ▲Adjustable Foot ◆Shelf Holder

CHANNEL SPECS: Channel Widths: 9mm (11/32") Channel Depths: 10mm (3/8") CONVERSIONS: MM to IN: (MM ÷ 25.4) IN to MM: (IN x 25.4) MTR to FT: (MTR x 3.281) FT to MTR: (FT ÷ 3.281)




PROFILES

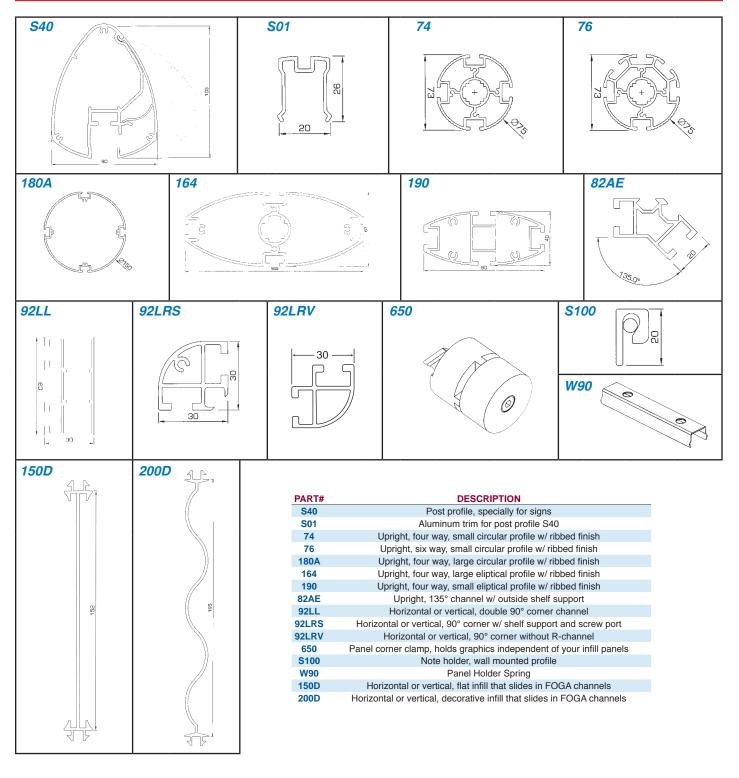


 CHANNEL SPECS:
 Channel Widths:
 9mm (11/32")
 Channel Depths:
 10mm (3/8")
 CONVERSIONS:
 MM to IN: (MM ÷ 25.4)
 IN to MM: (IN x 25.4)
 MTR to FT: (MTR x 3.281)
 FT to MTR: (FT ÷ 3.281)



CURVED PROFILES

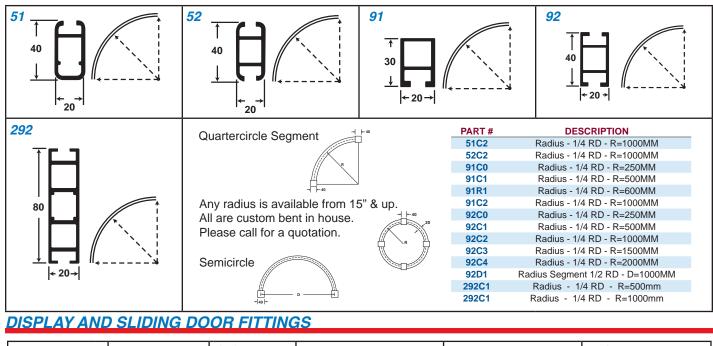


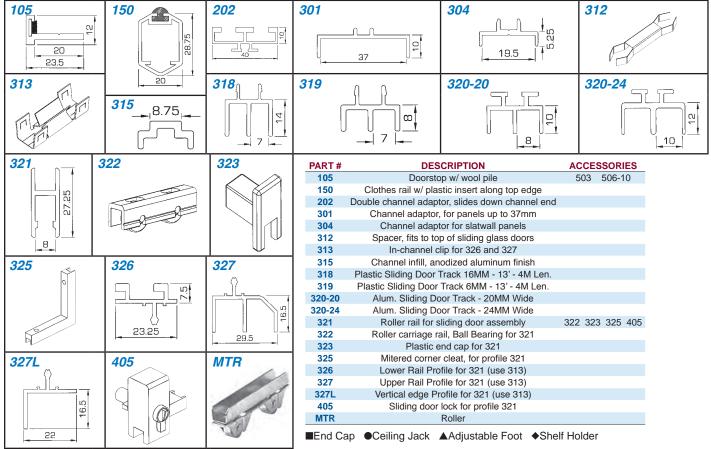

CHANNEL SPECS: Channel Widths: 9mm (11/32") Channel Depths: 10mm (3/8") **CONVERSIONS:** MM to IN: (MM ÷ 25.4) IN to MM: (IN x 25.4) MTR to FT: (MTR x 3.281) FT to MTR: (FT ÷ 3.281)



HINGES, LOCKS AND FEET

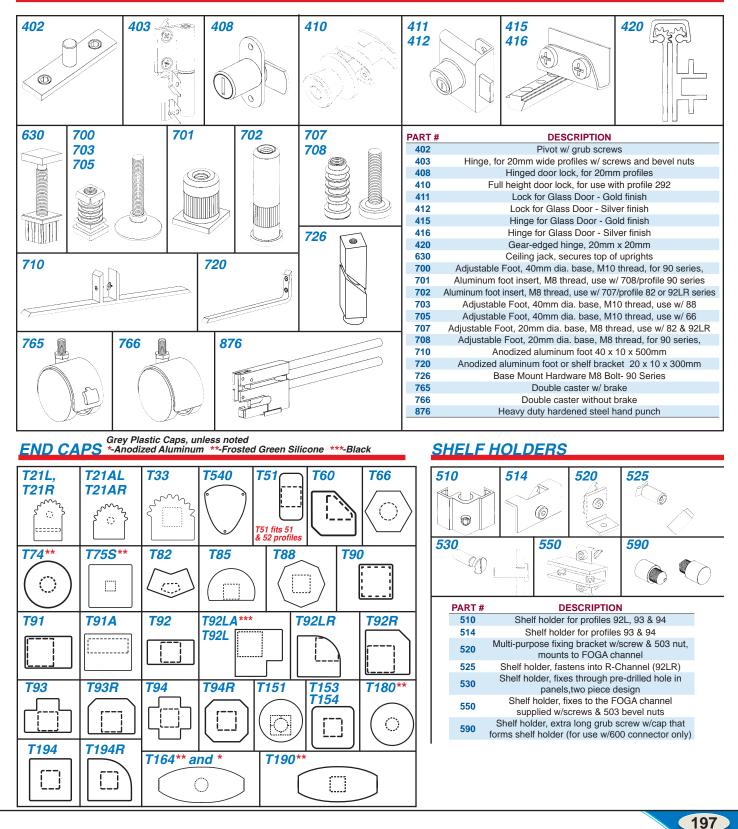


FOGA[®] SYSTEMS

CHANNEL SPECS: Channel Widths: 9mm (11/32") Channel Depths: 10mm (3/8") CONVERSIONS: MM to IN: (MM ÷ 25.4) IN to MM: (IN x 25.4) MTR to FT: (MTR x 3.281) FT to MTR: (FT ÷ 3.281)




GLAZING GASKETS, TRIM LOCKING NUTS

MOST ALUMINUM LENGTHS ARE STOCKED IN (5-MTR OR 16.4') LENGTHS

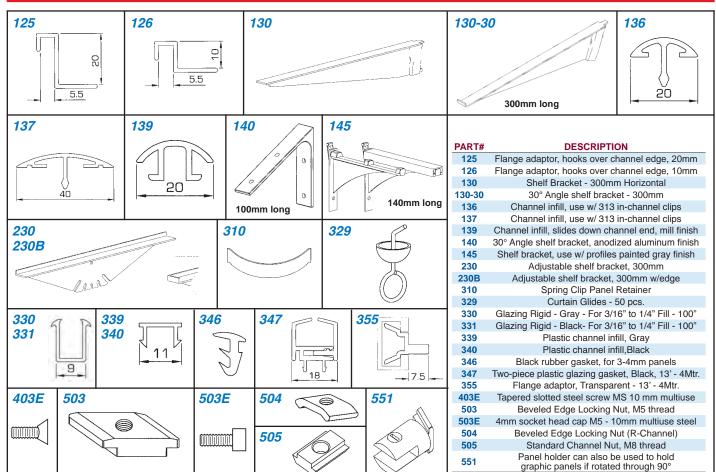


CORNER COUPLINGS




	END CAPS - PLASTIC (unless otherwise noted)						
	PART #	DESCRIPTION	PART #	DESCRIPTION			
	T952B	Zinc, Glossy Chrome w/screw 82, 92LR(F)	T960	Plastic, Glossy Black, Snap 92LR(F)			
$\overline{}$	T952Z	Zinc, Unfinished	T960B T960Z	Zinc, Glossy Chrome w/screw 60 Zinc, Unfinished w/screw 60			
		w/screw 82, 92LR(F)	T960SB	Plastic, Glossy Chrome w/screw 60			
		Zinc, Glossy Chrome	T960SB0	Plastic, Glossy Gold w/screw 60			
-	T953B	w/screw 82, 60	T961	Plastic, Matte Chrome, Snap 92LR(F)			
	≺ T953Z	Zinc, Unfinished	T962	Plastic, Glossy Chrome, Snap 60			
		w/screw 82, 60	T963	Plastic, Matte Chrome, Snap 60			
\nearrow			T964	Plastic, Glossy Black, Snap 92L, 92R			
	T951B	Zinc, Glossy Chrome	T965	Plastic, Glossy Black, Snap 194R			
	10010	w/screw 92LR(F)	T966	Plastic, Matte Chrome, Snap 194R			
	T951M	Zinc, Matte Chrome	T967	Plastic, Matte Chrome, Snap 92L, 92R			
		w/screw 92LR(F) Zinc. Unfinished	T968	Plastic, Glossy Chrome, Snap 194R			
	T951Z	w/screw 92LR(F)	T969	Plastic, Glossy Chrome, Snap 92LR(F)			
	705400	Plastic, Glossy Chrome	T970	Plastic, Glossy Chrome, Snap 60			
J	T951SB	w/screw 92LR(F)	T971	Plastic, Glossy Chrome, Snap 92L, 92R			
	T951SBG	Plastic, Glossy Gold w/screw 92LR(F)					

CHANNEL SPECS: Channel Widths: 9mm (11/32") Channel Depths: 10mm (3/8") CONVERSIONS: MM to IN: (MM ÷ 25.4) IN to MM: (IN x 25.4) MTR to FT: (MTR x 3.281) FT to MTR: (FT ÷ 3.281)



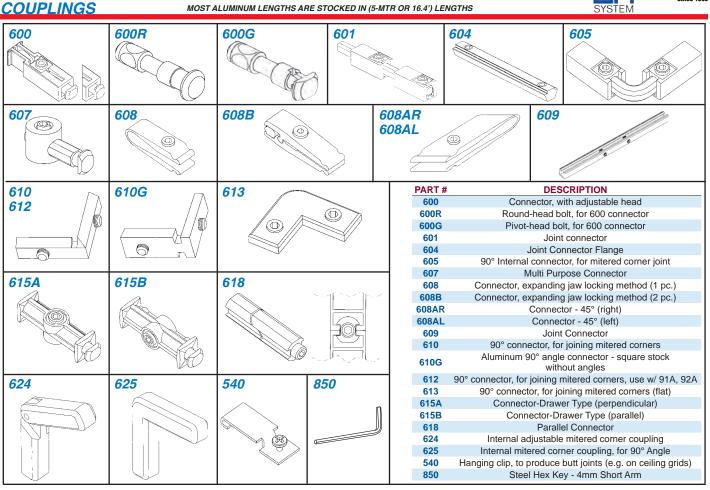


SLIDING DOOR FITTINGS

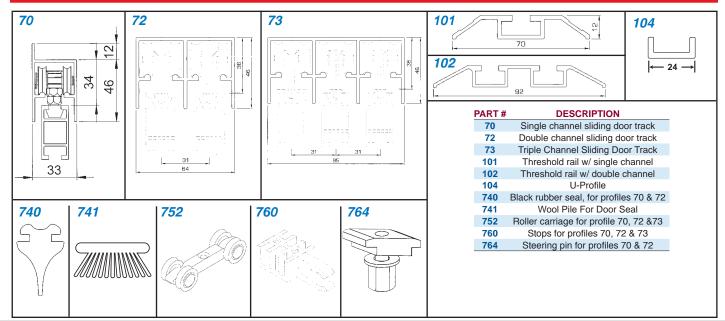

CHANNEL SPECS: Channel Widths: 9mm (11/32") Channel Depths: 10mm (3/8") **CONVERSIONS:** MM to IN: (MM ÷ 25.4) IN to MM: (IN x 25.4) MTR to FT: (MTR x 3.281) FT to MTR: (FT ÷ 3.281)



MOST ALUMINUM LENGTHS ARE STOCKED IN (5-MTR OR 16.4') LENGTHS

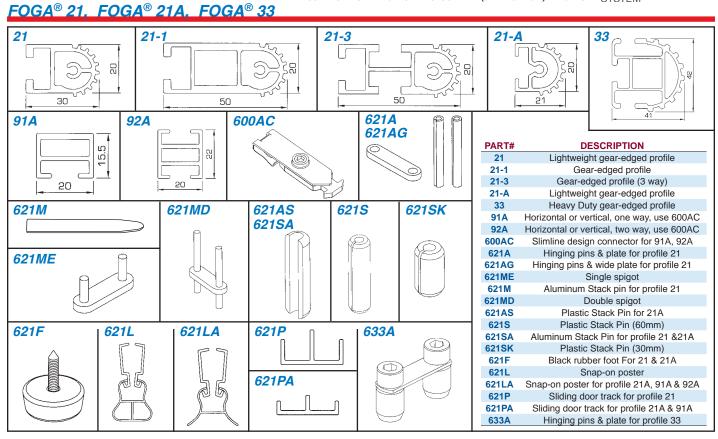

FOGA[®] MINI

M21			M92	·		M318		M525
M600A M600B	M610	M621A	M621F	M625	M319 M525	DESCRIPT Ultralight Gear-ed Horizontal or vertical, Horizontal or vertical, 90° Corner C Plastic Sliding Door Tra Plastic Sliding Door Tr Shelf Holder, fo Connector For M91 & M	ged profile one way profile two way profile hannel ck (12mm deep) ack(6mm deep) r M92LR	
M707	<u>M872</u>			950B 950C		Connector For M91 & M 90° in-channel corr Hinge set for Black rubber foo 90° Mitered Corne Black plastic foot Drilling Tool For M6 astic corner knuckle for stic corner knuckle for	ner coupling r M21 er Coupling for M92LR 00A, M600B M92LR, black finish	

FOGA[®] SYSTEMS

FOGA® IS A BUILDING SYSTEM FULLY INTEGRATED AND MODULAR. ITS WIDE RANGE OF ALUMINIUM PROFILES AND UNIQUE PATENTED COUPLING MAKES IT A COMPLETE PROGRAM FOR EXHIBITIONS. SHOPFITTING AND INTERIOR DESIGN.



BUILD OFFICE PARTITIONS; BUILD FURNITURE, SHOWCASES, DISPLAY CABINETS, MERCHANDISING UNITS, SALES KIOSKS - THE LIST IS ENDLESS; ALL IT TAKES IS CREATIVITY - THE KIND YOU HAVE WITH FOGA®.

FOGA® IS AESTHETICALLY DESIGNED. PRECISION ENGINEERED AND ANODIZED IN NATURAL ALUMINIUM TO OFFER DESIGNERS COMPLETE FLEXIBILITY IN DESIGN AND CREATIVITY.

FOGA[®]-System... No other way makes it so easy!


FOGA[®]'s wide range of aluminium extrusions and components offers limitless expression to both the designer's dilemma and the craftsman's creativity. With FOGA® even non-standard designs provide maximum scope for adaption and reuse and the system's speed and ease of assembly help to minimize construction and installation costs. Superior Strength of the FOGA[®] System

The FOGA[®] coupling system gains its superior locking

strength through two main features:

(a) The 3 mm profile shoulders.

(b) The double locking faces of the locking which positively engage against both shoulders ensures that profile being coupled are square to each other at all times.



The Key to FOGA[®] Assembly

The key to FOGA® assembly is the exclusive FOGA® coupling. All extrusions have channels to accept the coupling providing infinite adjustments and flexibility. The coupling itself can be fitted to any extrusion which has the 20 mm x 20 mm square built into its shape. The only tool needed to assemble FOGA® is an allen key. Illustrated is FOGA® Profile 91. A 10 mm hole is punched or drilled 28,6 mm from the end of the profile to the center of the hole. The consistency of these measurements allows for the coupling to be inserted in all appropriate FOGA[®] Profiles and ensures accuracy of performance at all times.

Standard finish of all profiles is natural anodized to 10 microns. Color anodized or powder coated available to special order. Profiles available in 5 meter stock lengths. All dimensions in mm. SUBJECT TO TECHNICAL ALTERATIONS

FSU-SC-4131 41½" x 31½" x 8" I.D.

<u>FOGA® SHIPPING CASES</u>



32 lbs.


FOGA[®] System profile 91, already fitted with the patented FOGA[®] coupling, being engaged simply and speedily into profile 88.Insertion of the coupling bolt (a 90 degree turn and tighting with an alien key) produces a rigid and stable connection in all FOGA® constructions.



THE PATENT FOGA® COUPLING 615

- 1. The screw should be levelled with the insert. Press the bolt into the case so that the insert drops down and level with the case.
- 2. Push the coupling into the profile and release the press and the insert pops up into the punchhole. Tighten the coupling.

FSU-SC-CU




GREAT IDEAS NEED ACCESSORIES!

Shown 1" Tubing with Cladding Fittings & Wide Variety of LED Lighting Options



SLIDING DOOR TRACK



PLASTIC FINGER PULLS

With high quality pressure sensitive adhesive backing. No holes to drill. Peel off protective backing paper and apply directly to surface of glass.

170-BK (Black) 170-CL (Clear)




ALUMINUM FRAME DOOR



Create a door frame with 1" tubing on page 204

Connectors on pages 205-206, 209

Add a hinge to complete the door -





POLYPROPYLENE HINGE BLACK OR WHITE Screw Size Recommended #10 Countersunk (not included)

 PART #
 COLOR

 200-200-WH
 White

 200-200-BK
 Black

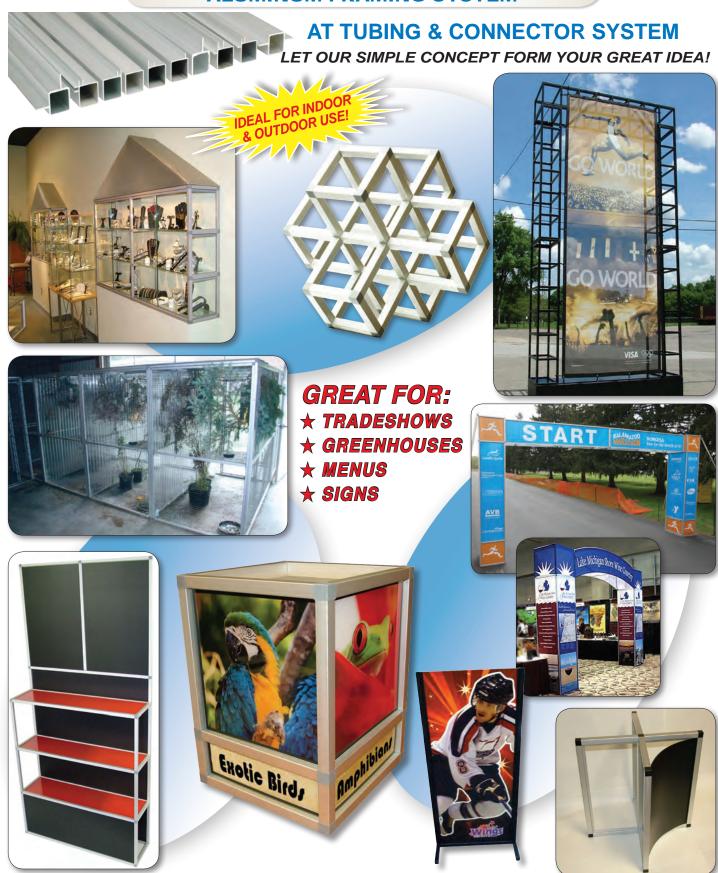

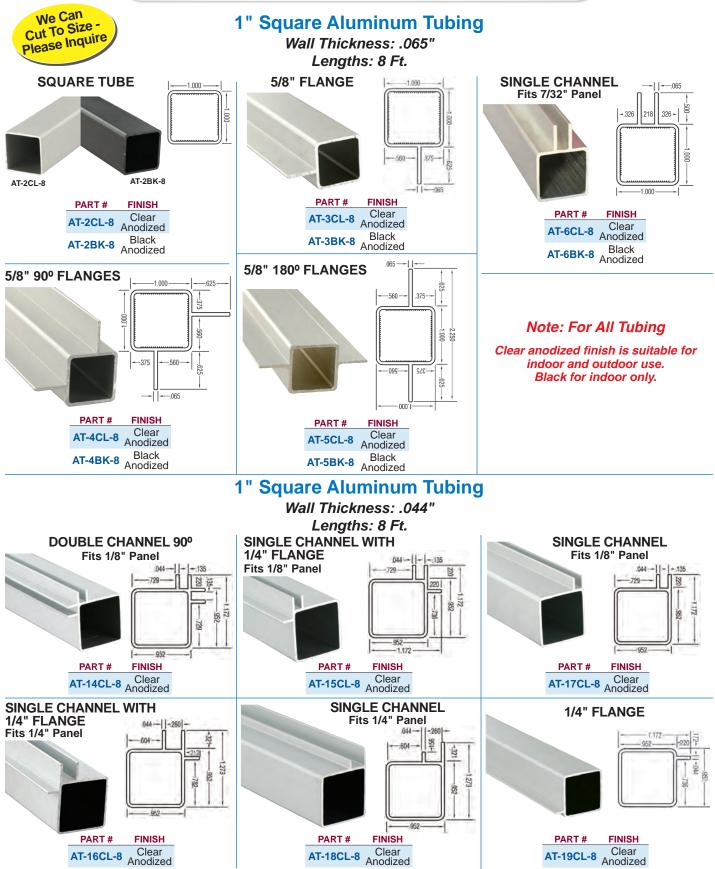

1" Tubing Connectors & Accessories

Material: Dupont[™] Super Toughened Nylon Available in Black or Grey

2WAY RIGHT ANGLE CONNECTOR	3WAY TEE CONNECTOR	** 3WAY CONNECTOR w/HEAVY DUTY CASTER SOCKET
PART # COLOR F521BK Black F521GY Grey	PART # COLOR F532BK Black F532GY Grey	**NOTE: #F533C will accept a 3/8" diameter x 1" long friction fit caster stem (not included) See Below for Caster
3WAY CORNER CONNECTOR	4WAY CROSS CONNECTOR	PART #COLORF533C/BKBlackF533C/GYGrey
The second se	ET OT	3WAY CONNECTOR w/2-3/8" DIA CASTER W/FRICTION RING STEM
	PART # COLOR F544BK Black F544GY Grey 4WAY CONNECTOR	Without Brake
		WITHOUT BRAKE PART # COLOR F533C/BK-CST Black F533C/GY-CST Grey WITH BRAKE
PART # COLOR F533BK Black F533GY Grey	PART # COLOR F545BK Black F545GY Grey	PART # COLOR F533C/BK-CSTB Black F533C/GY-CSTB Grey
5WAY CONNECTOR	6WAY CONNECTOR	3WAY CONNECTOR
E E E		w/LEVELER 1/4-20 x 1" LONG 1-3/8" Base Dia. w/Thread Stem & Insert NEW
PART #COLORF558BKBlackF558GYGrey	PART #COLORF568BKBlackF568GYGrey	PART # COLOR F533C/BK-LEV Black F533C/GY-LEV Grey

1" Tubing Connectors & Accessories

Material: Dupont[™] Super Toughened Nylon Available in Black or Grey





completed on these items. Hard samples are available for prototype purposes only, please inquire.

FINISH

Grey

PART #

F48558GY

F48558BK Black

207

PART #

F48568BK

F48568GY

FINISH

Black

Grey



1" Tubing Connectors & Accessories



FITS 1" TUBE & HOLDS 1/4" PANEL **CLADDING RIGID VINYL** Available in Black or Clear Material: PVC 12' lengths

> PART # FINISH 109-CL Clear 109-BK Black

CASING TRIM FOR 1/4" PANELS 1" BASE Available in Black or Nickel With Adhesive Tape Material: PVC 6' lengths



PART # FINISH CT8NC Nickel Black CT8BK



PART # FINISH CT16NC Nickel CT16BK Black


CASING TRIM FOR

1/2" PANELS 1" BASE

Available in Black or Nickel

With Adhesive Tape

Material: PVC 6' lengths




CASING TRIM

Cast trim with adhesive tape is shown attached to our 1" tubing

CASING TRIM FOR 3/4" PANELS 1" BASE Available in Black or Nickel With Adhesive Tape Material: PVC 6' lengths

CELEBRATION





PART # FINISH CT24NC Nickel CT24BK Black

Material: Dupont[™] Super Toughened Nylon Available in Black or Grey



ADJUSTABLE 2WAY CONNECTOR ADJUSTABLE TEE STYLE CONNECTOR WITH Material: PVC ROTATING BASE 15° Incremental locking from Vertical/Horizontal 90° to 180° for 1" Tubing For 1" Tubing Material: PVC PART # FINISH PART # FINISH FJ22BK Black FJ32BK Black FJ22GY Grev FJ32GY Grey **ADJUSTABLE 2WAY ADJUSTABLE 2WAY IN-LINE** CONNECTOR **BASE CONNECTOR** w/LOCKING NUT For 1" tubing to connect For 1" Tube with another tube CAPABLE OF 280° RADIUS

> PART # COLOR F52AJNBK Black F52AJNGY Grey

at multiple angles

Material: PVC PART # FINISH FJ31BK Black FJ31GY Grey

Any Angle, Any Panel, Any Display R MULTIPLE PANELS 16x W Wien BM

BMW SHOWROOM IN AUSTRIA

PRODUCT FEATURES:

- Join panels in thicknesses ranging from 1/8" to 3/4"!
- The Klem[®] connector makes it easy to create angles from 90° to 270°!
- Ideal for straight or curved walls, prisms, squares cubes, pyramids, domes or any type of display!
- Made of nickel plated zinc alloy and synthetic rubber inserts. The Klem® connector provides great strength and long term durability.
- Standard gap between panels Mini = 1/2" Super = 3/4"
- To Close gap between panels, Notch the panels. Mini = 1/4" x 15/16" Super = 5/16" x 1-3/8"





SHOWCASE

PARTITION



MUSEUMS & GALLERIES



TRADE SHOWS

MAJAKAR



CLASSIC URN STANCHIONS



IN LINE QUEUE MANAGEMENT SYSTEM








- WOOD STANCHIONS
- Furniture Grade Quality
- Solid Red Oak with English Oak Stain
- Durable commercial grade finish
- Handcarved
- Pre-finished & sealed with a hand rubbed teak oil.
- Works with all standard ropes
- Exquisite Craftsmanship
- 72 Combinations
- Ships UPS
- Ropes attach at a 36 inch height





See page 212 for more information on ropes

Braided

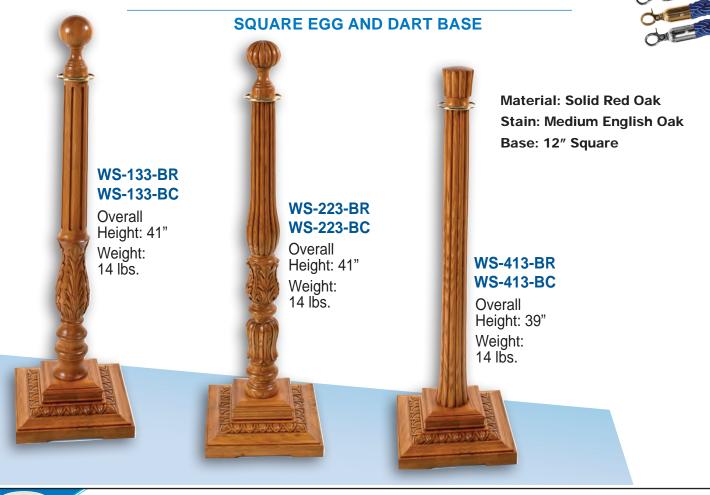



ROUND ACANTHUS LEAF BASE

Material: Solid Red Oak Stain: Medium English Oak Base: 13-3/4" Diameter **WS-121-BR WS-121-BC** Overall **WS-211-BR** Height:41" **WS-211-BC** Weight: 15 lbs. **WS-331-BR** Overall WS-331-BC Height: 41" Overall Weight: 14 lbs. Height: 39" Weight: 15 lbs.

PLASTIC & LIGHTED LED STANCHION ACCESSORIES



PLASTIC S-HOOKS

Colors available: White, Polished Chrome or Black

BLACK & WHITE (COLOR CODE [*] BK=Black, WH=White)					
PART # SIZE					
SH32-*	1"				
SH48-*	1-1/2"				
SH64-*	2"				

 POLISHED CHROME

 PART #
 SIZE

 SH32-PC
 1"

 SH48-PC
 1-1/2"

 SH64-PC
 2"



SPRING LOADED NYLON RETRACTABLE CONNECTING LINK



Colors available: Black or White

PART #COLORSNAP-BKBlackSNAP-WHWhite

PLASTIC CLOTHES PIN



216

Colors available: Ivory • Clothes pin attaches to plastic chain.

> PART # COLOR PC-HANGPIN Ivory

All colors stocked in 33 ft. lengths
 (Polished Chrome stocked in 16 ft. lengths)



- Available in 3/4", 1", 1-1/2" and 2" links.
- Color chains must be purchased in full 33' lengths. (Polished Chrome must be purchased in 16 ft. lengths).
- All plastic chains come bagged except for 2" chain which comes on a reel.

*Color Code=	PART # SIZE
BL (Blue)	PC24-* 3/4"
RD (Red)	PC32-* 1"
PK (Pink)	PC48-* 1-1/2"
GR (Green)	PC64-* 2"
OR (Orange)	
WH (White)	POLISHED CHROME ONLY
BK (Black)	PART # SIZE
PC (Polished Chrome)	PC32-PC 1"
YE (Yellow)	PC48-PC 1-1/2"
	PC64-PC 2"

Other colors available - please inquire

PLASTIC CONNECTING LINKS

Colors available: White, Polished Chrome or Black

((BLACK	& WHITE K=Black, WH=W	/hite)	[1
1	PART #	SIZE			1
(CL48-*	1-1/2"			
	CL64-*	2"			(3
	POLISHEL	CHROME			
	PART #	SIZE			
	CL48-PC	1-1/2"			
	CI 64-DC	2"			

SIGNAGE ADAPTER (ONLY WORKS WITH PLASTIC STANCHIONS)

Colors available: Black or White








PUBLIC GUIDANCE SYSTEMS


PLASTIC STANCHIONS WITH BASE

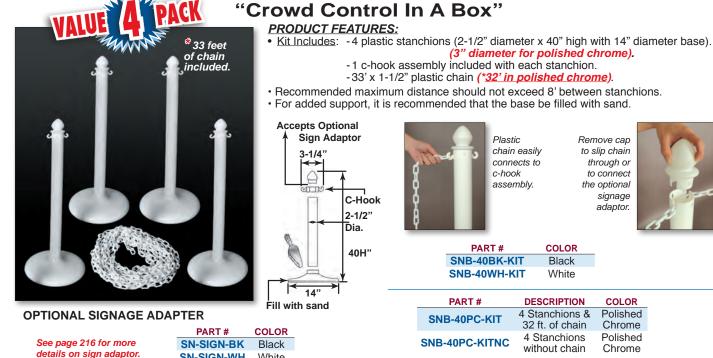

PLASTIC STANCHIONS WITH BASE **Great For Most Control Needs!**

SN-SIGN-WH





White

PRODUCT FEATURES:

 Recommended maximum distance should not exceed 8' between stanchions.

- · For added support, it is recommended that the base be filled with sand.
- · One C-hook assembly included with each stanchion. (C-Hook NOT removeable on SNB-40PC)

PART #	COLOR	DESCRIPTION
SNB-40BK	Black	40"H x 2-1/2 Dia.
SNB-40WH	White	40"H x 2-1/2 Dia.
SNB-40PC	Polished Chrome	40"H x 3" Dia.

Other colors available - please inquire


OPTIONAL SIGNAGE ADAPTER

See page 216 for more details on sign adaptor.

COLOR PART # **SN-SIGN-BK** Black **SN-SIGN-WH** White

PLASTIC LANDSCAPE STANCHIONS WITH STAKE

Great For Outdoor Events, Landscapes & Gardens!

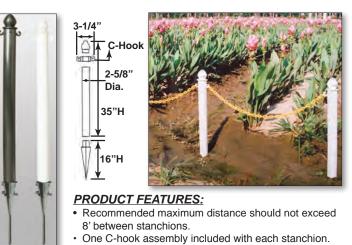

PART #	COLOR	DESCRIPTION
SNS-40BK	Black	35"H x 2-5/8"

SNS-40BK	Black	35″H x 2-5/8″	
SNS-40WH	White	35"H x 2-5/8"	

Other colors available - please inquire

OPTIONAL SIGNAGE ADAPTER

See page 216 for more	
details on sign adapto	r.

PART # COLOR **SN-SIGN-BK** Black SN-SIGN-WH White

PUBLIC GUIDANCE SYSTEMS


HEAVY DUTY PLASTIC STANCHIONS



Great For Construction Sites and Parking Lots!

PRODUCT FEATURES:

- Recommended maximum distance should not exceed 20' between stanchions.
- When the base is completely filled with water, the stanchion weight increases to 16 lbs., thus providing additional support.
- · One C-hook assembly included with each stanchion.



PART #	DESCRIPTION
SNB-40HD	Yellow w/black stripes w/black base
SNB-40HD-KIT	4 pcs. Yellow w/black stripes w/black base

OPTIONAL SIGNAGE ADAPTER

See page 216 for more details on sign adaptor.

PART #COLORSN-SIGN-BKBlackSN-SIGN-WHWhite

LIGHTED LED PLASTIC STANCHIONS



Portable Lighted Plastic Stanchion with red, green, blue LED light. Continuous or flashing option. Requires 1 x 9v battery, (*not included*) or can run off the **included** power Adaptor (AC in DC out). *Not for outdoor use when using AC/DC power adaptor.*

PRODUCT FEATURES:

- · Recommended maximum distance should not exceed 8' between stanchions.
- One C-hook assembly included with each stanchion.
- C-Hook 2-1/2" Dia. 40H"

3-1/4"

- Average light time 1-2 hours with 9V battery.
- Color: Red, Green, Blue Mix.
- 21 Diodes = 420 m.A (Amper) Ideal for Decoration & Caution areas.
- 4 Option Light Speed Control Switch (under cap finial).

PART #

Each post is 40 inches high including the cap finial. The base is 14" in diameter, and the post is 2-1/2" in Diameter. Each LED post weighs 4 lbs.

