
2014




MILLWORK - EXTERIOR

MILLWORK: EXTERIOR

Pgs. 960-973

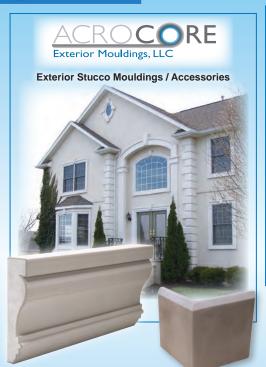













Louvers

Window Trims (Crossheads and Pilasters)









ACROCORE EPS CEMENT FACED MOULDINGS	AMERICAN PRO-VINYL EXTERIOR MOULDINGS	FYPON EXTERIOR MILLWORK
Accessories	Mouldings	Mouldings
Corbels963	Crown	Chair Rail966
Keystones963	Drip Cap973	Classic Dentil966
	Quarter Round973	
Plinth Blocks963	Ram's Solid Crown	Cove966
Quoins	Scotia	Crown Dentil966
Commercial Profiles962	EPS CEMENT FACED MOULDINGS962-963	Crown966
Custom Program	FYPON EXTERIOR MILLWORK	Dentil Fascia966
Arches963	Brackets (Decorative)967	Dentil966
	Corbels (Decorative)968	
Overview960	Dentil Blocks (Decorative)968	Window966
Residential Profiles	Door Trims (See Window Trims)	Window Trims
American Series961		Decorative Dentil Mouldings969
European Series961	Door Crossheads970	Decorative Trim Strips969
Traditional Series961	Keystones970	
ADHESIVES		Pediments970
Multi-Purpose Adhesive/Filler972-973	Pilasters971	Window Crossheads969
AMERICAN PRO-VINYL EXTERIOR MOULDINGS	Louvers (Decorative & Functional)	U.S. WELBUILT EXTERIOR MOULDINGS
Mouldings	Cathedral965	Mouldings
Base Cap973	Octagon965	Base Cap
Bed	Round965	Brick
Brick	Triangle965	Ram's Solid Crown
	SEE PAGES 1007-1023 FOR A - Z INDEX	

Exterior Stucco Mouldings & Accessories

Exterior Mouldings, LLC

MADE IN USA

EPS (Expanded Polystyrene)

Lighter. Stronger. Smarter Any Profile... Any Size... You Decide...



Introducing Acrocore's[™] line of exterior EPS mouldings. Unlimited designs of lightweight stucco moulding trim, sills, bands, quoins, keystones, corbels and more. Our wide range of products are enduring, labor saving and extremely cost-effective. Custom profiles made to order are also available.



Double coated flexible cement faced EPS foam mouldings &

> **Ordinary Cement Faced EPS** Mouldings

Double Coated Flex Cement Mouldings



accessories

Ordinary cement faced eps mouldings are fragile and brittle. They do not absorb impact as well as our Double Coated Flex Cement Mouldings.

Standard 8 ft. lengths are available in sizes ranging from 5" to 24"

Commercial Profiles





Massive unfinished EPS foam profiles for easy shipping & on site finishing in hundreds of readily available stock & custom profiles

Exterior Stucco Mouldings & Accessories



EPS (Expanded Polystyrene)




Lighter. Stronger. Smarter Any Profile... Any Size... You Decide...



Residential Profiles

Featuring 3 Pre-Designed Series





Traditional Series



European Series



Hundreds of Profiles Available



Exterior Mouldings & Accessories

EPS (Expanded Polystyrene)

MADE IN USA

Lighter. Stronger. Smarter Any Profile... Any Size... You Decide...



Commercial Profiles

Our Commercial Series of Exterior Mouldings encompass a wide range of larger, dimensionally appropriate profiles that have been specifically designed for their aesthetic suitability with our smaller scale residential series profiles for use on all types of commercial structures.

Our Commercial Series profiles are shipped uncoated, enabling maximum onsite post installation design

flexibility and cost effective shipping.







Exterior Stucco Mouldings & Accessories




MADE IN USA

EPS (Expanded Polystyrene)


Lighter. Stronger. Smarter Any Profile... Any Size... You Decide...






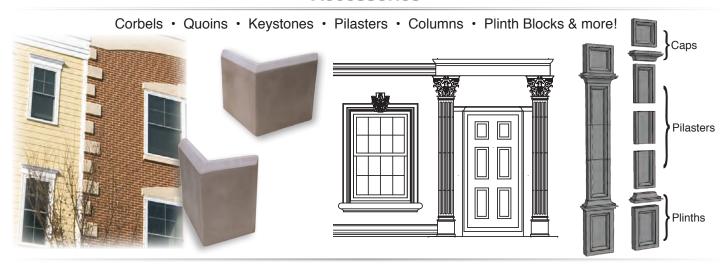

Custom Program

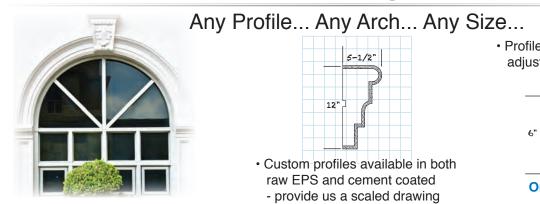




Arches made to order - provide us your radius or templates





ARCH/	CASING A	PPLICATIONS	
HALF CIRC	LE ARCH /	CASING:	
PART#	QTY.	RADIUS	INSIDE RADIUS - ← Width → Inside Diameter Length = Radius + width of moulding x 3.14 7÷ 12
EYEBROW	ARCH / CA	SING:	
PART#	QTY.	HEIGHT x WIDTH X X X X	Rise from Center 10 A Height Width 60"→ Length = height+ width +6 ÷ 12 Ex. 10" + 60" ÷ 12 = 6.33"
ELLIPTICAL	LARCH/C	ASING:	
PART#	QTY.	TEMP NO.	Paper or cardboard template needed

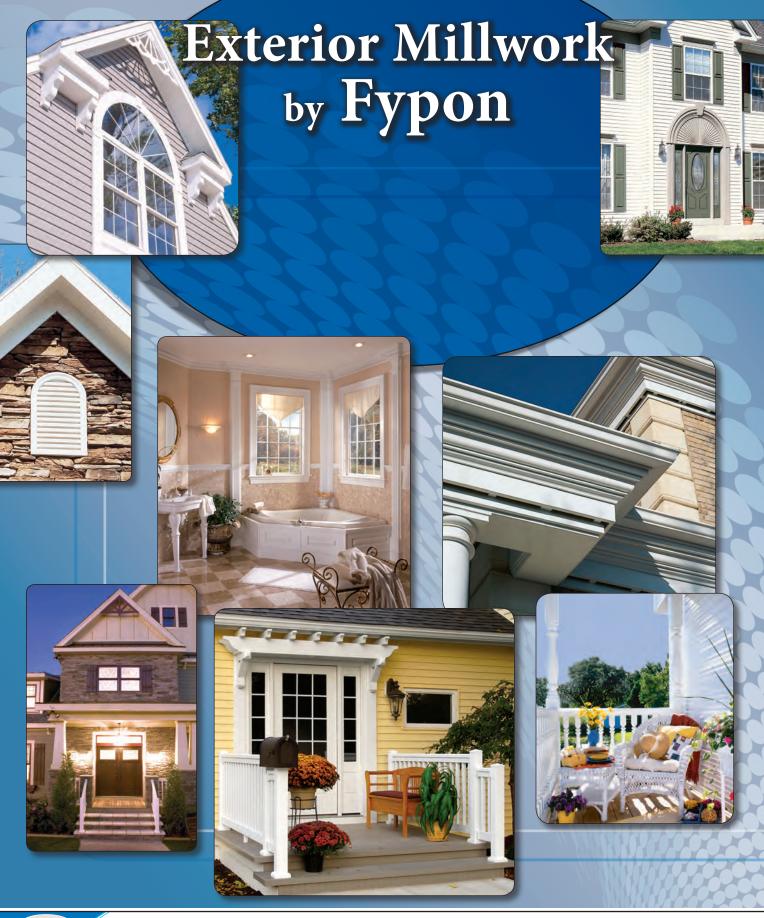

Exterior Louvers/Gable Vents

Round, Octagon, Cathedral & Triangle Louvers



Exterior Millwork High Density Polyurethane

DECORATIVE LOUVERS

Have closed non-ventilating

slats that do not allow air to

exterior sidewall applications

pass through. They are used for

decorative purposes only to accent

18" 22"

• 45-degree angled slats on functional louvers protect interiors from precipitation.
• Primed with ultraviolet stable coating.

- **AND** • A variety of shapes and sizes complement most architectural styles.
- Unlike wood, Fypon® louvers resist insect infestation and will not rot, warp, decay or split. **BENEFITS**
 - · Easy installation.

FUNCTIONAL LOUVERS

Accent exterior sidewall applications, but also have open slats that allow for air ventilating. Includes a screen backing to keep insects out.

NOTE: If you are ordering a Functional Louver, your rough opening should be approximately 2" smaller around the entire perimeter of

> All louvers can be ordered with siding rout for a neat professional finish. Please specify upon ordering. (Rout is a flat 5/8" x 5/8" groove).


Airflow



Shown: RLV24TK



DECORATIVE OCTAGON LOUVER



DECORATIVE	FUNCTIONAL
PART #	PART #
OLV18	
OLV22	FOLV22



DECORATIVE CATHEDRAL LOUVER



	В
-	A

DECORATIVE FUNCTIONAL

Α	В	PART #	PART#
12"	24"	CLV12X24	
16"	36"	CLV16X36	
18"	30"	CLV18X30	FCLV18X30
22"	31-1/2"	CLV22X31	FCLV22X31
24"	48"	CLV24X48	
28"	43"	CI V28X43	FCI V28X43



DECORATIVE ROUND LOUVER






	DECORATIVE	FUNCTIONAL
DIA.	PART #	PART#
16"	RLV16	
18"	RLV18	FRLV18
22"	RLV22	FRLV22
24"	RLV24	FRLV24
28"	RLV28	FRLV28
30"	RLV30	FRLV30
36"	RLV36	FRLV36



TRIANGLE LOUVER

CATHEDRAL LOUVER **TRIM**

WORKS WITH FCLV22X31 & CLV22X31



Α	В	TRIM WIDTH	PART #
22-3/16"	31-11/16"	3-1/2"	CLV22X31X4F




Top Edge of Roo Vertical Unit Run (12") Horizontal Run

Pitch Information

Pitch indicates that incline of a roof as a ratio of the vertical rise to the horizontal run. It is properly expressed as X distance in 12 inches.

For example: A roof that rises at a rate of seven inches for each foot of run is designated as having a 7/12 pitch.

NOTE: If you are ordering a Functional Louver, your rough opening should be approximately 2" smaller around the entire perimeter of the louver.





Α	В	PITCH	PART #	PART #
48"	12"	6/12	TRLV48X12	
48"	24"	12/12	TRLV48X24	FTRLV48X24
60"	17-1/2"	7/12	TRLV60X18	FTRLV60X18
60"	22-1/2"	9/12	TRLV60X23	FTRLV60X23
64"	26-1/2"	10/12	TRLV64X27	FTRLV64X27
65"	21"	7-3/4/12	TRLV65X21	FTRLV65X21
66"	22"	8/12	TRLV66X22	FTRLV66X22
76"	19"	6/12	TRLV76X19	
84"	17-1/2"	5/12	TRLV84X18	FTRLV84X18

All louvers can be ordered with siding rout for a neat professional finish. Please specify upon ordering. (Rout is a flat 5/8" x 5/8" groove).



PL Pre	mium Adhesive
PART#	SIZE
ADH1	10.6 oz Cartridge

EXTERIOR MILLWORK


Style Solutions: | Style Solutions | Exterior Millw High Density Polyurethane |


Exterior Millwork

Mouldings



DOOR/WINDOW MOULDINGS






PART#	LENGTH	Α	В	С
MLD220-12	12'	1-3/4"	5-1/2"	3/4"

CLASSIC DENTIL MOULDING






PART#	Α	В	С	SPACE	LENGTH
MLD310-12	1-1/4"	4-1/2"	7/16"	1-1/2"	12'
MLD310-16	1-1/4"	4-1/2"	7/16"	1-1/2"	16'

Works with DTLB 6x4x6, see page 968.

DENTIL FASCIA MOULDING





PART#	Α	В	С	SPACE	LENGTH
MLD330-12	1-5/8"	7"	7/8"	2"	12'

COVE MOULDING







PART#	Α	В	С	LENGTH
MLD583-16	8"	8"	1/2"	16'

CORNICE MOULDING








PART# **LENGTH** MLD240-8 8 3-1/4" 4" 11/16"

DENTIL MOULDING





PART #	Α	В	TOOTH/ SPACE	LENGTH
MLD354-12	1"	3-1/16"	1-5/8"	12'-2-1/4"

CROWN DENTIL MOULDINGS








PART#	Α	В	С	SPACE	LENGTH
MLD411-16	4-1/2"	7"	1/2"	1-1/2"	16'

CROWN MOULDINGS









PART #	Α	В	С	LENGTH
MLD452-8	2"	3"	1/4"	8'
MLD452-12	2"	3"	1/4"	12'

CHAIR RAIL MOULDINGS







PART#	Α	В	С	LENGTH
MLD610-8	1-1/2"	2-3/8"	1/2"	8'

IMPORTANT: A urethane base adhesive such as PL Premium Adhesive must be used on all joints. See page 965 to order PL premium Adhesive, ADH1.


Decorative Millwork/ Decorative Brackets




Exterior Millwork High Density Polyurethane


DECORATIVE BRACKETS


- · Detailed millwork is architecturally accurate.
- Paintable products are double primed with exterior grade ultraviolet stable coating.
- Resist insect infestation, will not rot, warp decay or split.
- · Easy installation.

























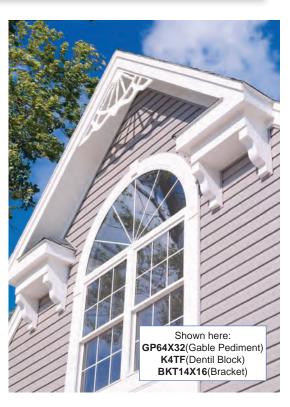

PART #	Α	В	С
BKT6X8	6"	8"	1-1/2"
BKT7X10	7-5/8"	10-5/8"	3"
BKT7X16	7-7/16"	16-1/4"	5-1/2"
BKT8X8	8"	8"	2"
BKT10X12	10-1/8"	12-1/2"	1"
BKT12X12WW	11-13/16"	11-13/16"	1"
BKT14X14	13-1/2"	13-1/2"	3-1/2"
BKT14X15	14"	14-5/8"	1"
BKT19X20	19-1/2"	19-9/16"	1-1/8"

USING CORROSION-RESISTANT FASTENERS AND PL PREMIUM ADHESIVE

Always use corrosion-resistant mechanical fasteners (nails or screws) and PL Premium Adhesive when installing Fypon Products. This combination provides a secure, long lasting bond. Countersink all fasteners about 1/8" and fill with exterior grade white spackle. If desired, sand any minor imperfections and topcoat with a quality exterior latex or oil base paint. Fypon exterior millwork installations should be finished using a quality, exterior grade silicone caulk to prevent water infiltration behind siding, windows and doors. Some exterior millwork installations, in particular new construction (before siding is applied) may require a J-channel and/or flashing to prevent water infiltration. Installers must determine which installation technique is best for the specific situation.


IMPORTANT: A urethane base adhesive such as PL Premium Adhesive must be used on all joints. See page 965 to order PL premium Adhesive, ADH1.


Decorative Millwork/ Corbels/Dentil Blocks




Exterior Millwork High Density Polyurethane

CORBELS








PART #	Α	В	С
COR5X10	5-1/4"	10"	4"
COR10X14	9/16"	14-1/2"	3-3/4"
COR11X20	11"	20"	6-1/2"




DTLB8X6X6

DENTIL BLOCKS











USING CORROSION-RESISTANT FASTENERS AND PL PREMIUM ADHESIVE

Always use corrosion-resistant mechanical fasteners (nails or screws) and PL Premium Adhesive when installing Fypon Products. This combination provides a secure, long lasting bond. Countersink all fasteners about 1/8" and fill with exterior grade white spackle. If desired, sand any minor imperfections and topcoat with a quality exterior latex or oil base paint. Fypon exterior millwork installations should be finished using a quality, exterior grade silicone caulk to prevent water infilltration behind siding, windows and doors. Some exterior millwork installations, in particular new construction (before siding is applied) may require a J-channel and/or flashing to prevent water infiltration. Installers must determine which installation technique is best for the specific situation. IMPORTANT: A urethane base adhesive such as PL Premium Adhesive must be used on all joints.

See page 965 to order PL premium Adhesive, ADH1.

PART #	Α	В	С
DTLB6X4X6	5-1/2"	6-1/8"	4-3/4"
DTLB6X6X8	8"	5-3/8"	5-1/2"
DTLB8X6X6	5-1/4"	8-1/8"	5-1/2"
DTLB9X11X16	16"	9-1/4"	11-1/4"
DTLB4X4X7	7-1/2"	4-5/16"	5"

Window and Door Trim



Exterior Millwork High Density Polyurethane



FEATURES AND BENEFITS

- · Custom sizes available.
- · Primed with ultraviolet stable coating.
- Unlike wood, Fypon® window and door trim products resist insect infestation and will not warp, decay or split.
- Easy Installation.

All crossheads are available routed and with the following factory applied accessories:

Without Accessories




With Accessories

Dentil Trim (D)

Trim Strip (T)

Bottom Trim (BT)

Adds 1" to height



A Keystone cannot be used when combining a Crosshead with a Pediment

(Pilaster) NOTE: ALL MODIFIED CROSSHEADS ARE NON-RETURNABLE

6" WINDOW CROSSHEADS

Shown here:


WCH64X9 (Crosshead) PIL7X108



PART#	Α	В
WCH24X6	24"	27-1/2"
WCH30X6	30"	33-1/2"
WCH32X6	32"	35-1/2"
WCH33X6	33-5/8"	37-1/8"
WCH34X6	34"	37-1/2"
WCH36X6	36"	39-1/2"
WCH37X6	37-5/8"	41-1/8"
WCH38X6	38"	41-1/2"
WCH40X6	40"	43-1/2"
WCH41X6	41-5/8"	45-1/8"
WCH43X6	43"	46-1/2"
WCH44X6	44"	47-1/2"
WCH48X6	48"	51-1/2"
WCH56X6	56"	59-1/2"

PART#	Α	В
WCH60X6	60"	63-1/2"
WCH64X6	64"	67-1/2"
WCH68X6	68"	71-1/2"
WCH72X6	72"	75-1/2"
WCH74X6	74"	77-1/2"
WCH76X6	76"	79-1/2"
WCH80X6	80"	83-1/2"
WCH87X6	87"	90-1/2"
WCH96X6	96"	99-1/2"
WCH100X6	100"	103-1/2"
WCH104X6	104"	107-1/2"
WCH108X6	108"	111-1/2"
WCH110X6	110"	113-1/2"

9" WINDOW CROSSHEADS



PART#	Α	В
WCH24X9	24"	29-1/2"
WCH32X9	32"	37-1/2"
WCH33X9	33-5/8"	39-1/8"
WCH34X9	34"	39-1/2"
WCH36X9	36"	41-1/2"
WCH37X9	37-5/8"	43-1/8"
WCH38X9	38"	43-1/2"
WCH40X9	40"	45-1/2"
WCH41X9	41-5/8"	47-1/8"
WCH43X9	43"	48-1/2"
WCH44X9	44"	49-1/2"
WCH48X9	48"	53-1/2"
WCH60X9	60"	65-1/2"
WCH64X9	64"	69-1/2"
WCH68X9	68"	73-1/2"

PART#	Α	В
WCH72X9	72"	77-1/2"
WCH73X9	73"	78-1/2"
WCH74X9	74"	79-1/2"
WCH76X9	76"	81-1/2"
WCH80X9	80"	85-1/2"
WCH84X9	84"	89-1/2"
WCH85X9	85"	90-1/2"
WCH96X9	96"	101-1/2"
WCH99X9	99"	104-1/2"
WCH100X9	100"	105-1/2"
WCH101X9	101"	106-1/2"
WCH103X9	103"	108-1/2"
WCH104X9	104"	109-1/2"
WCH108X9	108"	113-1/2"
WCH110X9	110"	115-1/2"
WCH113X9	113"	118-1/2"
WCH197X9	197"	202-1/2"

KEYSTONES



PART # K6M KP6M K6M Keystone For 6" Crossheads KP6M Recessed Panel Keystone For 6" Crossheads



	Matcl					
ŧ	Α	В	С	D	Е	F
	5-3/4"	7"	4"	3-7/8"	6"	1-1/2"
	5-3/4"	7"	4"	4-1/8"	6"	1-3/4"

B B

K9M Keystone For 9" Crossheads

KEYSTONES

KP9M Recessed Panel Keystone For 9" Crossheads



	Mat	Matches all 9" Crossheads						
PART#	Α	В	C	D	Ε	F		
K9M	8"	11"	6"	5-3/4"	9"	1-1/8"		
KP9M	8"	11"	6"	6-1/4"	6"	1-5/8"		



12" WINDOW CROSSHEAD

PART # A B WCH96X12 96" 101-1/2"


All pediments can be ordered with siding rout for a neat professional finish. Please specify upon ordering. (Rout is a flat 5/8" x 5/8" groove)



Exterior Millwork

High Density Polyurethane Entrance Trim / Crossheads

6" DOOR CROSSHEAD



PART#	Α	В
WCH54X9	54"	59-1/2"
WCH56X9	56"	61-1/2"
WCH67X9	67"	72-1/2"
WCH81X9	81"	86-1/2"
WCH86X9	86"	91-1/2"
WCH90X9	90"	95-1/2"
WCH93X9	93"	98-1/2"



K6M & K9M Keystones For 6", 9" & 12" Crossheads

KP6M &KP9M Recessed **Panel** Keystone For 9" Crossheads



	Matches all 6", 9" & 12" Crossheads							
F	PART#	Α	В	С	D	E	F	
	K6M	5-3/4"	7"	4"	3-7/8"	6"	1-1/2"	
	K9M	8"	11"	6"	5-3/4"	9"	1-1/8"	
	Matches all 9" Crossheads							
		Matc	ches al	1 9" Cr	ossheads	3		
F	PART#	Mato A	hes al	1 9" Cro	ossheads D	E	F	
_					ossheads D 4-1/8"		F 1-3/4"	

9" DOOR CROSSHEAD

Window & Entrance Trim

SUNBURST WINDOW PEDIMENT HALF ROUND




PART #	W	Н
SWDH24X12	24"	12"
SWDH30X15	30"	15"
SWDH32X16	32"	16"
SWDH33X17	33-5/8"	16-3/4"
SWDH36X18	36"	18"
SWDH37X19	37-5/8"	18-13/16"
SWDH40X20	40"	20"
SWDH42X21	42"	21"
SWDH44X22	44"	22"
SWDH48X24	48"	24"
SWDH56X28	56"	28"
SWDH60X30	60"	30"
SWDH64X32	64"	32"
SWDH68X34	68"	34"
SWDH72X36	72"	36"
SWDH76X38	76"	38"

USING CORROSION-RESISTANT FASTENERS AND PL PREMIUM ADHESIVE Always use corrosion-resistant mechanical fasteners (nails or screws) and PL Premium Adhesive when installing Fypon Products. This combination provides a secure, long lasting bond. Countersink all fasteners about 1/8" and fill with exterior grade white spackle. If desired, sand any minor imperfections and topcoat with a quality exterior latex or oil base paint. Fypon exterior millwork installations should be finished using a quality, exterior grade silicone caulk to prevent water infiltration behind siding, windows and doors. Some exterior millwork installations, in particular new construction (before siding is applied) may require a J-channel and/or flashing to prevent water infiltration. Installers must determine which installation technique is best for the specific situation.


IMPORTANT: A urethane base adhesive such as PL Premium Adhesive must be used on all joints. See page 965 to order PL premium Adhesive, ADH1.

> All pediments can be ordered with siding rout for a neat professional finish. Please specify upon ordering. (Rout is a flat 5/8" x 5/8" groove).

ACORN COMBINATION PEDIMENT



							ACORN
PART#	Α	В	С	D	PROJ.	PITCH	MATCH
CAP50	50"	54-1/2"	17-1/4"	21-1/8"	3-1/8"	6/12	A5X10
CAP54	54"	58-1/2"	18-3/8"	21-3/8"	3-1/8"	6/12	A5X10
CAP75	75"	79-1/2"	22-1/16"	25-1/8"	3"	6/12	A5X10
CAP80	80"	84-7/16"	20-3/4"	25-3/8"	3-1/8"	5-1/2/12	A5X12
CAP85	85"	89-3/8"	21-13/16"	28"	3-1/8"	5/12	A5X12



Entrance Trim / Pilasters



Exterior Millwork High Density Polyurethane

Sold in sets only

PLAIN PILASTERS

ONE PIECE W/ATTACHED PLINTH BLOCK



				PLINTH
PART #	W	Н	PROJ.	BLOCK HT.
PIL5X90P	5-1/4"	90"	1-1/16"	10-1/16"
PIL7X90P	7"	90"	2-1/2"	13-3/16"
PIL8X90P	8"	90"	2-1/2"	13-3/16"
PIL11X90P	11"	90"	3-1/2"	13-3/16"
PIL11X108P	11"	108"	3-1/2"	14-1/2"

WITH ADJUSTABLE PLINTHBLOCK




				PLINTH
PART #	W	н	PROJ.	BLOCK HT.
PIL6X120P	6"	120"	2-1/2"	13-13/16"
PIL7X108P	7"	108"	2-1/2"	13"
PIL7X120P	7"	120"	2-1/2"	13"
PIL8X108P	8"	108"	2-5/8"	13"
PIL9X108P	9"	108"	3"	14-1/2"

DOUBLE PANEL PILASTER ONE PIECE W/ATTACHED PLINTH BLOCK



				PLINTH
PART#	W	Н	PROJ.	BLOCK HT.
PIL7X90DP	7"	90"	2-1/2"	13-3/16"
PIL9X90DP	9"	90"	3"	14-1/2"

HALF ROUND COLUMN PILASTER ONE PIECE W/ATTACHED PLINTH BLOCK



10"

All pediments can be ordered with siding rout for a neat professional finish. Please specify upon ordering. (Rout is a flat 5/8" x 5/8" groove).

6"

96'

FLUTED PILASTERS

ONE PIECE W/ATTACHED PLINTH BLOCK




USE FOR WINDOW APPLICATION PLINTH PROJ. BLOCK HT. PART# PIL5X90 5-1/4" 90' 1-5/8 10-1/8" PIL6X90 6-1/4" 2-1/2 13-1/8" 90' PIL7X90 13-3/16" 2-1/2'

90'

PIL9X90

3" WITH ADJUSTABLE PLINTH BLOCK

14-1/2



				PLINTH
PART #	W	Н	PROJ.	BLOCK HT.
PIL3X108	3-1/2"	108"	1-5/8"	10"
PIL4X108	4-1/2"	108"	1-5/8"	10"
PIL5X108	5-1/4"	108"	1-5/8"	10"
PIL6X108	6-1/4"	108"	2-1/2"	13-3/16"
PIL7X108	7"	108"	2-1/2"	13"
PIL7X144	7"	144"	2-1/2"	13"
PIL8X90	8"	90"	2-1/2"	13"
PIL8X108	8"	108"	2-1/2"	13"
PIL9X108	9"	108"	3"	14-1/2"
PIL11X108	11"	108"	3-1/2"	14-1/2"
PIL11X144	11"	144"	3-1/2"	14-1/2"

FLUTED PILASTER ECONOMY ONE PIECE W/ATTACHED PLINTH BLOCK



				PLINTH
PART #	W	Н	PROJ.	BLOCK HT.
PIL5X90E	5-1/4"	90"	1-1/4"	14-3/16"
PIL7X90E	7"	90"	1-5/16"	14-3/16"

Shown here:

K9M (Keystone) See pages 969-970

WCH93X9 (Moulding) See page 970 PIL7X108 (Fluted Pilaster) See above

EXTERIOR MOULDINGS



- U.V. Stabilized PVC (American Pro)
- Economy Polystyrene (*U.S. Welbuilt)
- Finish: WhiteLengths: Various
- Termite & Moisture proof (will not promote mildew or mold).
- No splitting, cracking, splintering or rotting.
- Ready to install with stainless steel nails, screws and construction adhesive.
- Installed using traditional tools and fasteners. Finished in white. Paint with oil or latex paint.
- · Better insulation characteristics than wood. Energy efficient.






Easy Shipping
Can be cut for




Crown Mouldings




CROWN MOULDING #1								
DIMENSIONS								
MANUFACTURER	PART #	MATERIAL	Α	В	LENGTH			
AMERICAN PRO	PVM-41	PVC	7-1/2"	1"	16 Ft.			
Motoboo AZEK# AZM 42								


Matches AZEK# AZM-43



CROWN MOULDING #2							
	DIMENSIONS						
MANUFACTURER	PART#	MATERIAL	Α	В	LENGTH		
AMERICAN PRO	PVM-45	PVC	5-1/4"	11/16"	16 Ft.		
Matches AZEK# AZM-45							



CROWN MOULDING #3								
	DIMENSIONS							
MANUFACTURER	PART#	MATERIAL	Α	В	LENGTH			
AMERICAN PRO	PVM-47	PVC	4-5/8"	11/16"	16 Ft.			
Matches A7FK# A7M-47								



CROWN MOULDING #4							
	DIMENSIONS						
MANUFACTURER	PART#	MATERIAL	Α	В	LENGTH		
AMERICAN PRO	PVM-49	PVC	3-5/8"	9/16"	16 Ft.		
Matches AZEK# AZM-49							



MP-25-ADH The "Original" Hybrid Formula

MP-25-ADH is a high performance, one component, permanently flexible, easy to use, multi-purpose fast cure modified polyurethane sealant. MP-25-ADH cures rapidly when exposed to atmospheric moisture to form a durable bond.

- · Use as adhesive or filler.
- Eco-friendly, low VOC's. Non-yel
- Fast cure.
- Paintable.

Non-yellowing.

PART # MP-25-ADH

★US Welbuilt is proudly manufactured from recycled high density polystyrene. Must be painted with an exterior UV stabilized paint.



EXTERIOR MOULDINGS





• U.V. Stabilized PVC (American Pro)

• Economy Polystyrene (*U.S. Welbuilt)

• Finish: White

• Lengths: Various





Bed Moulding	Bed	Mou	Iding
---------------------	-----	-----	--------------

			DI	ONS			
MANUFACTURER	PART #	MATERIAL	Α	В	LENGTH		
AMERICAN PRO	PVM-75	PVC	1-3/4"	9/16"	16 Ft.		
	A						

Matches AZEK# AZM-75



Base Cap	Moulding	
		DIMENSIONS

			DIMENSIONS					
MANUFACTURER	PART #	MATERIAL	Α	В	LENGTH			
AMERICAN PRO	PVM-164	PVC	1-1/8"	11/16"	16 Ft.			
Matches AZEK# AZM-164								

Quarter Round Moulding



			DIMENSIONS		
MANUFACTURER	PART #	MATERIAL	Α	В	LENGTH
AMERICAN PRO	PVM-106	PVC	3/4"	3/4"	16 Ft.


Matches AZEK# AZM-105



Scotia Moulding

		_	DIMENSIONS		
MANUFACTURER	PART #	MATERIAL	Α	В	LENGTH
AMERICAN PRO	PVM-2021	PVC	3/4"	3/4"	16 Ft.

Matches AZEK# AZM-93



Brick Moulding

DIMENSIONS

MANUFACTURER	PART #	MATERIAL	Α	В	LENGTH
AMERICAN PRO	PVM-180C	PVC	2"	1-1/4"	17 Ft.
*U.S. WELBUILT	EXTERIOR-180-8	Polystyrene	2"	1-1/4"	8 Ft.
*U.S. WELBUILT	EXTERIOR-180-12	Polystyrene	2"	1-1/4"	12 Ft.

Matches AZEK# AZM-180



Drip Cap Moulding

			וט	פאכ	
MANUFACTURER	PART #	MATERIAL	Α	В	LENGTH
AMERICAN PRO	PVM-188	PVC	1-5/8"	11/16"	16 Ft.

Matches AZEK# AZM-197



Ram's Solid Crown Moulding

			D	IMENSIC	ONS
MANUFACTURER	PART #	MATERIAL	Α	В	LENGTH
*U.S. WELBUILT	EXTERIOR-205	Polystyrene	2"	1-7/16"	12 Ft.
* U.S. WELBUILT	EXTERIOR-284	Polystyrene	2-1/4"	1-1/8"	12 Ft.



Base Cap Moulding

			DIMENSIONS		
MANUFACTURER	PART #	MATERIAL	Α	В	LENGTH
★ U.S. WELBUILT	FXTFRIOR-2820	PVC	1-3/8"	1/8"	8 Ft



MP-25-ADH The "Original" Hybrid Formula

MP-25-ADH is a high performance, one component, permanently flexible, easy to use, multi-purpose fast cure modified polyurethane sealant. MP-25-ADH cures rapidly when exposed to atmospheric moisture to form a durable bond.

- Use as adhesive or filler.
 - Paintable.
- Eco-friendly, low VOC's. Non-y
- Non-yellowing. PAR MP-25-

PART # MP-25-ADH



*US Welbuilt is proudly manufactured from recycled high density polystyrene. Must be painted with an exterior UV stabilized paint.